


Dimensions

18.1

Remote Head

Stabilized Axis	3 (Pan, Tilt, Roll)
Max. Payload	up to 30 Kg / 66 lbs.
Height	608 mm / 23.93"
Width	412 mm / 16.22"
Depth Head	150 mm / 5.9"
Depth Base	165 mm / 6.49"
Ring Diameter	260 mm / 10.23"
Ring Height centre	209 mm / 8.23"
Weight	9,4 Kg / 20,7 lbs.
Max. Tilt Range	+ 60° / -110°
Max. Roll Range	+/- 90°
Max. Pan Range	540° +/-270°
Max. Pan Rate	240° / Sec.
Max. Tilt Rate	240° / Sec.

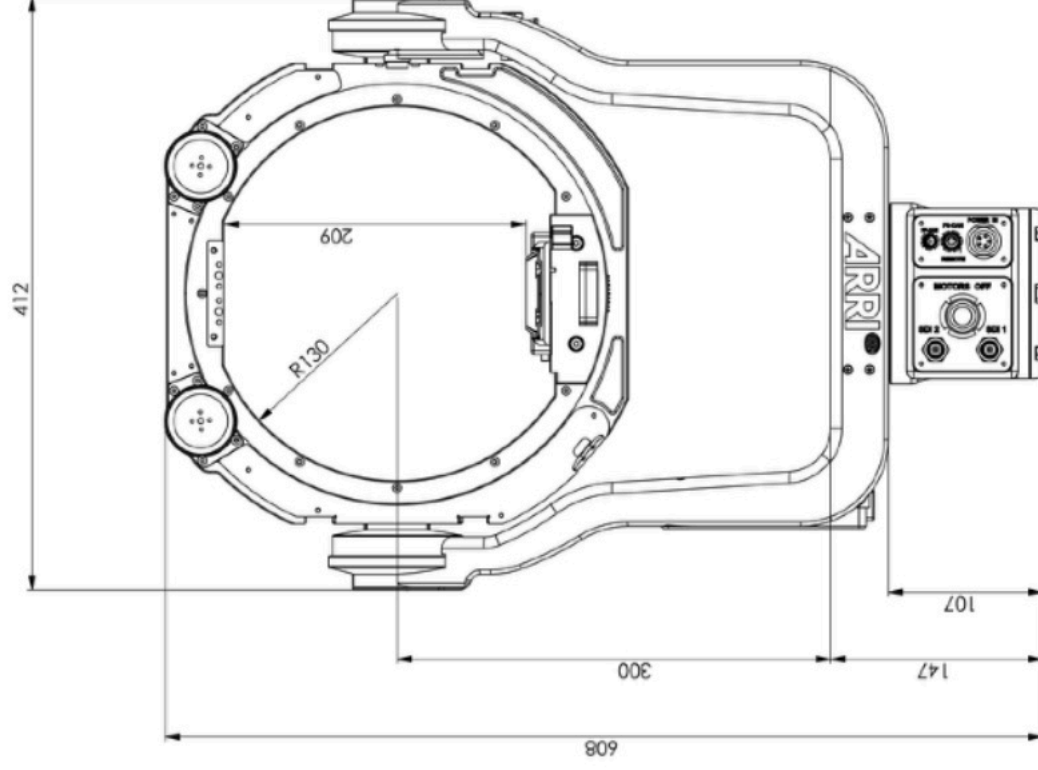

Technical data SRH-360

Stabilized Axis	3 (Pan, Tilt, Roll)
Max. Payload	up to 30Kg/66lbs
Height	62,5cm/25.67in
Width	41,2cm/16.22in
Depth Head	15 cm/5.9in
Depth Base	24,6cm/9.68in
Ring Diameter	26cm/10.23in
Ring Height centre	20,9cm/8.23in
Weight	11,6Kg/25.57lbs
Max. Tilt Range	+60° / - 110°
Max. Roll Range	+/- 90°
Max. Pan Range	Slip Ring, Unlimited
Max. Pan Rate	240° / Sec.
Max. Tilt Rate	240° / Sec.
Operating Voltage Head	24V - 36V
Output Camera	12V & 24V
Current	10 Amps
LBUS socket	Yes
RS socket	Yes
SAM plates compatible	Yes
Environmental	-20° to +50° / -4° F to 122° F