
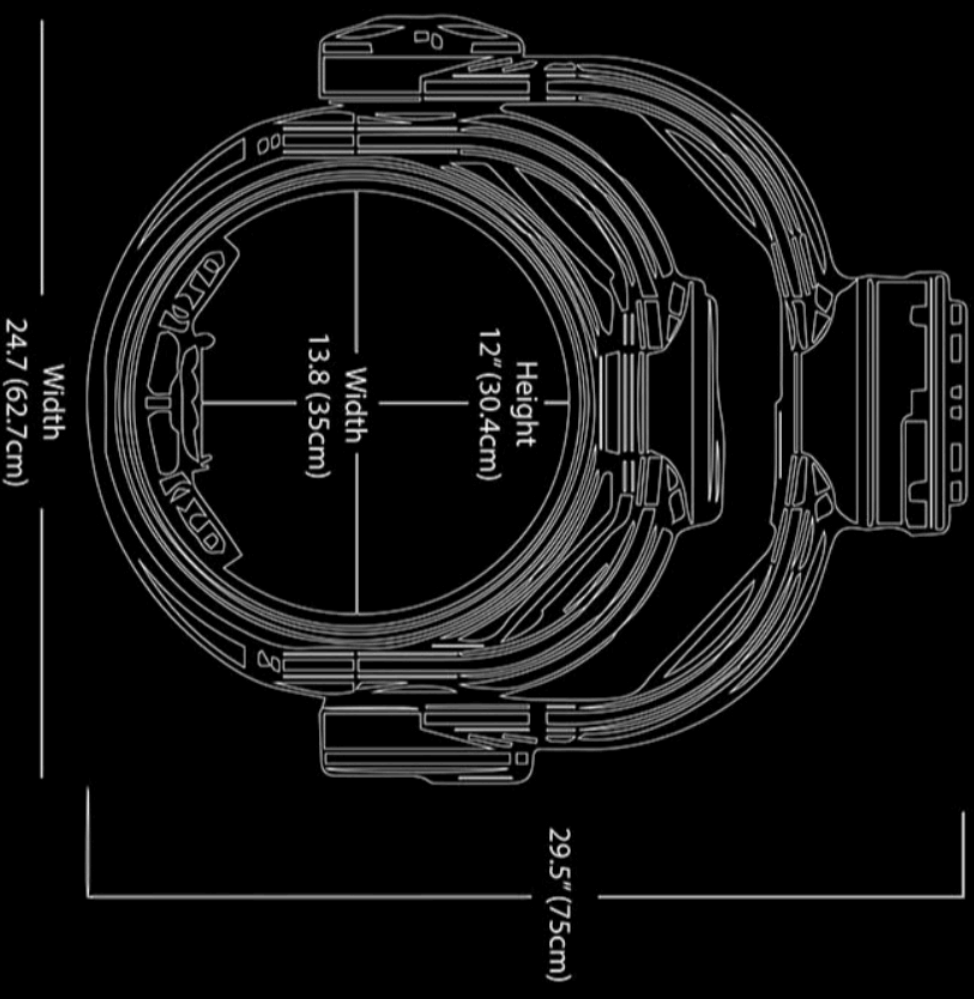


# Chapman M-7 EVU

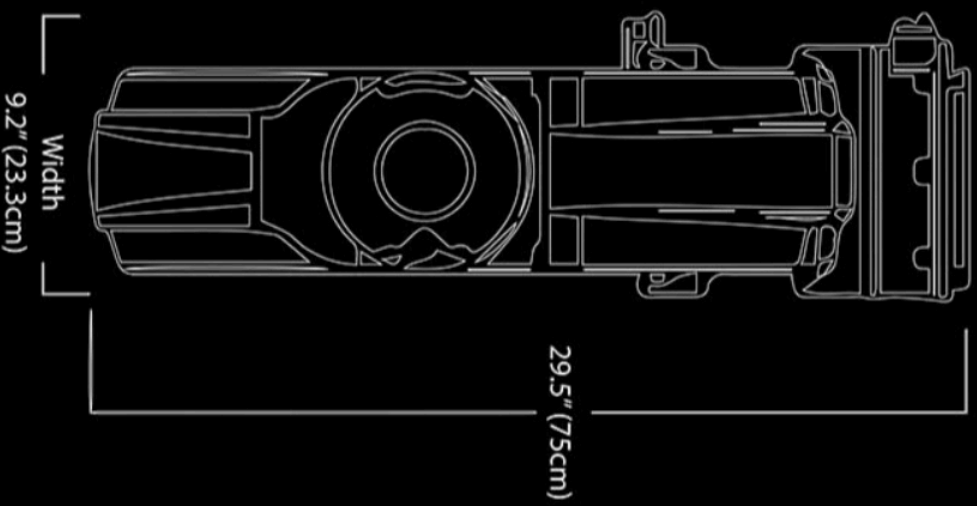

## **M-7 EVO Specifications**

4-Axis Height*	29.5 in.	66.04 cm
4-Axis Depth*	9.2 in.	20.32cm
4-Axis Length*	24.7 in.	59.69 cm
4- Axis Weight (without iso damp)	64lb	29.02 kg
4- Axis Weight (with isodamp)	74lb	33.64 kg
4- Axis Payload Capacity (Recommended)	100 lb	45.36 kg

Pan, Tilt and Roll Movement	360 Degrees Continuous
Speed Range (Pan & Tilt)	Up to 240 degrees/ sec.
Mounting Base	Standard Mitchell
Outputs at Camera (via Chapman Cable Package	BNC 75 Ohm (x3)
Voltage	12 volts at 2 amps for video (x2)
Voltage	12 or 15 volts at 10 amps peak (x2)
Voltage	24 or 30 volts at 15 amps peak
Lens Control Systems	Preston FIZ and Arri Lens Control
Power Supply	20-70 volts DC - .5 to .15 amps
Cable Supply	Wide Range

\*Height measured from Top of Castle Nut to Bottom of Tilt Plate.